


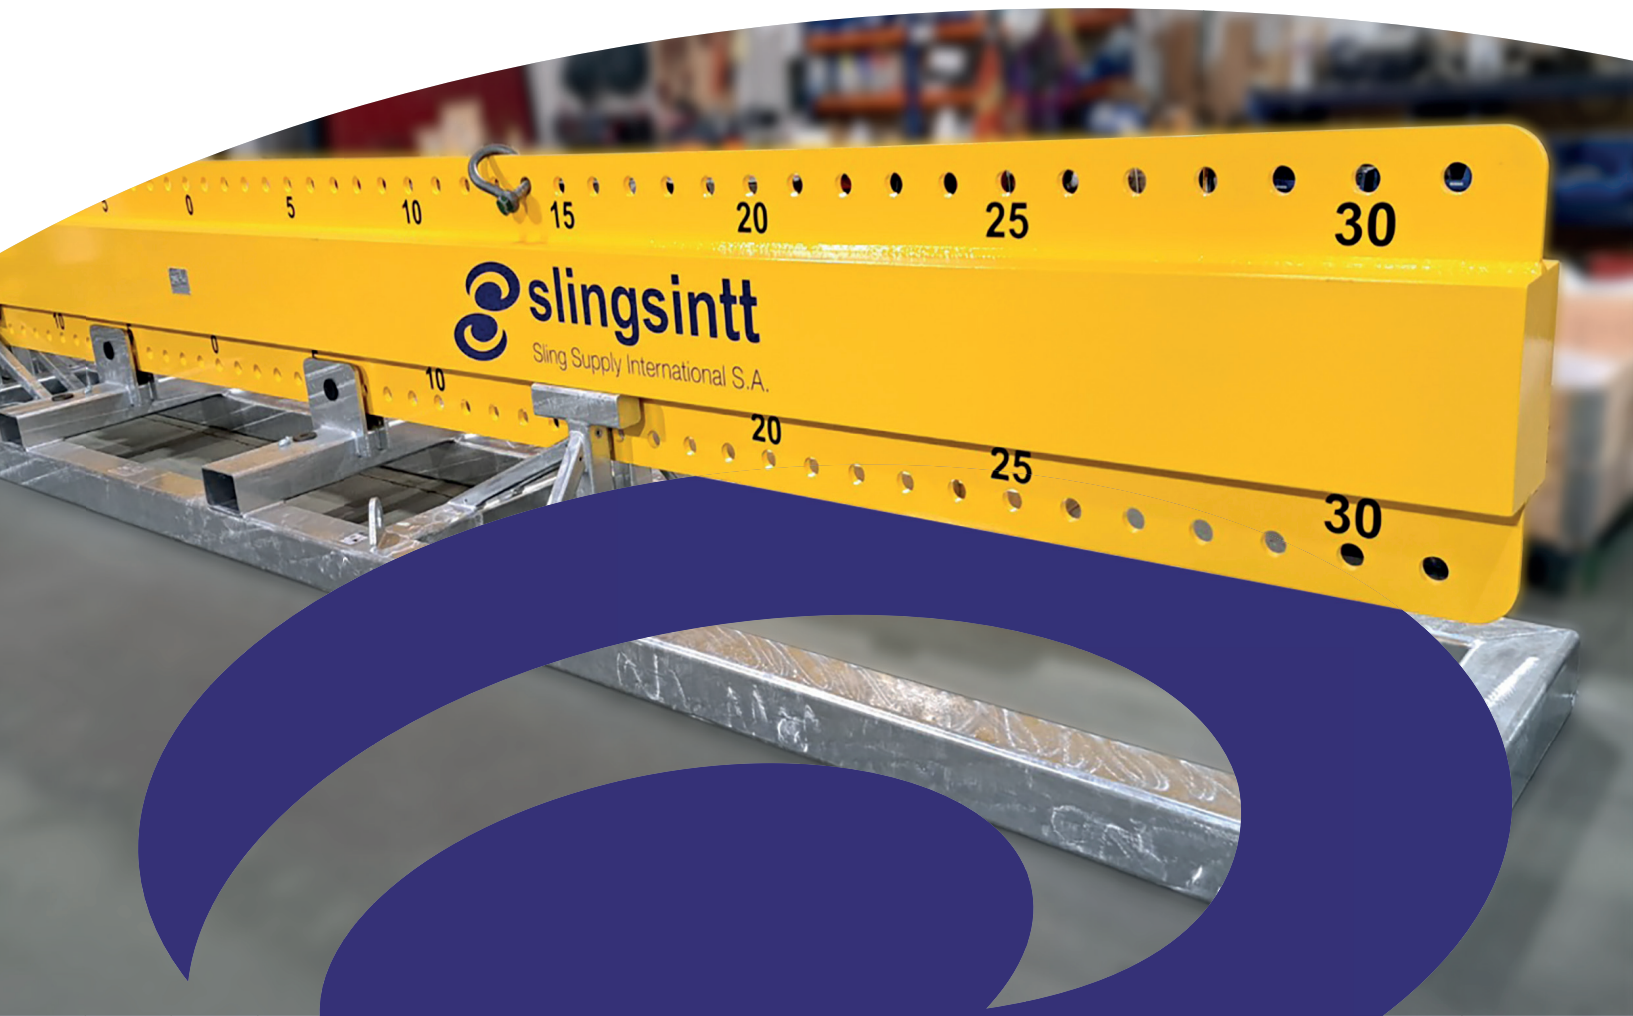

Multi-purpose **Lifting Beam**

BENEFITS OF USE

Multiple use configurations & long life design configuration

SPECIFICATIONS

- WLL: up to 100t
- Length: up to 12m
- Multi-applicable

COMPLY WITH

- EN 13155
- ASME BTH-1-2
- AS 4991

DELIVERED WITH


- User guide
- Declaration of conformity CE
- Identification tag in the beam

Proud member of



VAN BEEST

Multi-purpose **Lifting Beam**

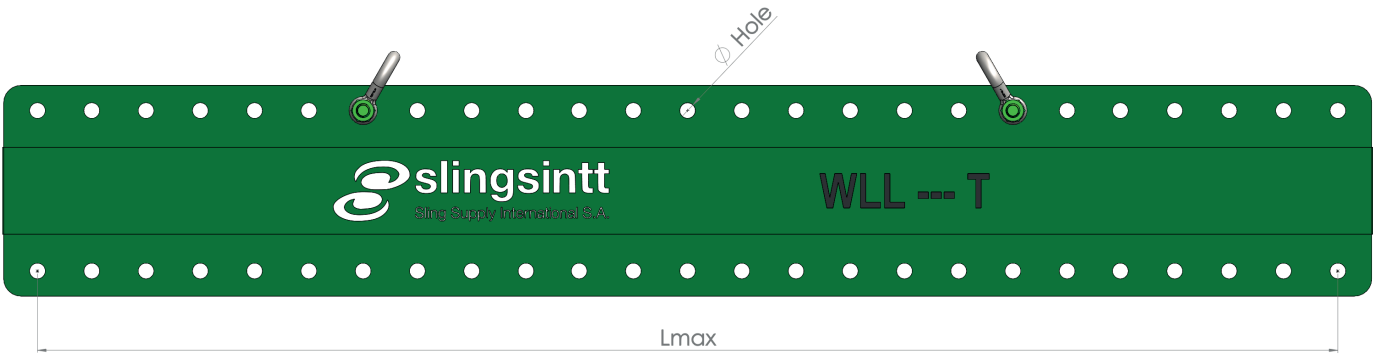

WLL (t)	Lmax (mm)	Hole Ø (mm)	Shackle (t)
2	2000-12000	25	4,75
5	2000-12000	32	8,5
10	2000-12000	48	17
15	2000-12000	55	25
20	2000-12000	62	35
30	2000-12000	72	42,5
40	2000-12000	76	55
50	2000-12000	90	85
70	2000-12000	90	85
100	2000-12000	85	125



EASY TO CONNECT LIFTING SHACKLES

Possibility to lift in both configurations:

- 1 upper shackle.
- 2 upper shackles.



1 UPPER SHACKLE:

- Only for centered loads.
- Both bottom shackles symmetrically placed at any position.



2 UPPER SHACKLES

- Maximum working angle $\alpha = 35^\circ$.
- Both upper shackles symmetrically placed at any position.
- Both bottom shackles symmetrically placed at any position.

Slingsintt

Astigarragako bidea, 2 4a - Planta Dcha. Oficina nº6
20180 Oiartzun - España/Spain

Tel: +(34) 943 344 116 - Email: slingsintt@slingsintt.com

www.slingsintt.com